

# Other Requirements

- The sewer pipe shall be: PVC-SDR-26

Or when the water service is in the same trench the pipe shall be:

PVC-SDR-21 or SDR-26 ASTM D2241 or  
DUCTILE IRON CL 52

- There shall be four inches (4") of stone bedding under the pipe.
- The pipe shall be covered with stone backfill a minimum of twelve inches (12") over the top of the pipe.
- The approved stone shall be:

CA-6 GRADE 8 or 9 or CA-11 #6 WASHED


- There shall be no tunneling under the public sidewalk. If you need to repair or replace a section under a public sidewalk, the walk must be removed and replaced using three (3) pieces of re-bar across the trench, tied (pinned) into the existing walk.
- If the sanitary sewer repair or replacement work will be performed in the public right-of-way (the area between the public sidewalk and the curb) the contractor must have an approved Certificate of Insurance and a \$50,000 Surety (License and Permit) Bond on file with the Village prior to permit issuance.
- A contractor must have a floating bond with the Village, or the contractor or homeowner shall place a \$500 cash refundable bond which will be refunded when the job is completed and restoration has occurred.



# Permit Submission Requirements

In addition to a completed application, all permit submissions are required to include the following information:

- Complete the diagram on the reverse side of this handout.




*In most cases, your sewer repair permit will be issued over the counter. If for some reason this cannot be accomplished, you will be given an approximate date when your permit will be issued.*

## Questions ?

*Please call the  
Community Development  
Department at  
(847) 357-4220  
Monday through Friday,  
between the hours of  
8:00 a.m. and 5:00 p.m.*

# Sewer Repair

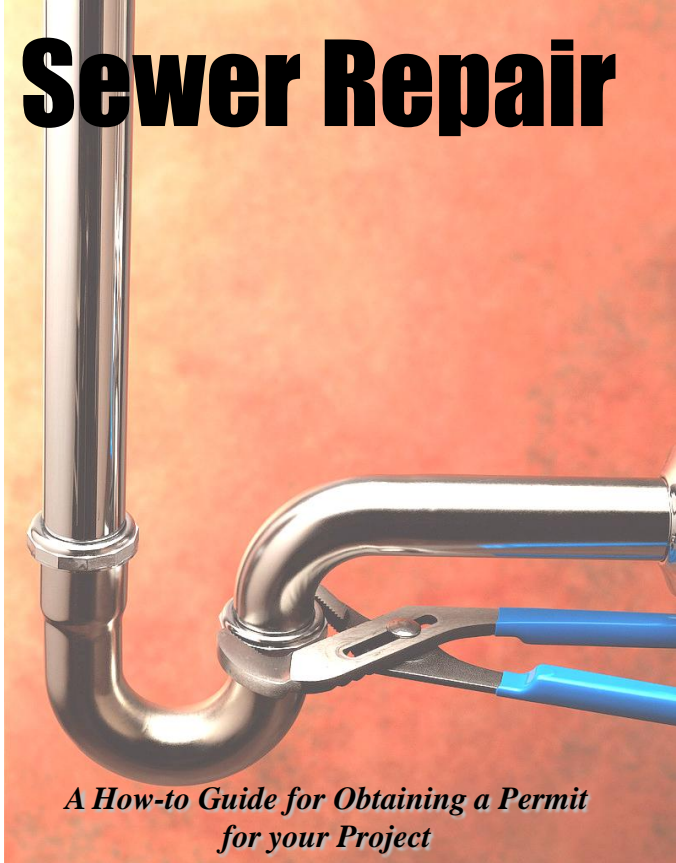

*A How-to Guide for Obtaining a Permit  
for your Project*

*Part of the .....*



**Elk Grove Village  
Home Improvement  
Series**

# RESIDENTIAL SEWER SERVICE REPAIR DIAGRAM

Please see reverse side of paper for permit submission requirements.

•ESTIMATED LENGTH OF PIPE:

\_\_\_\_\_

•WILL CLEANOUT BE INSTALLED?

YES \_\_\_\_\_

NO \_\_\_\_\_

• CIRCLE TYPE OF SEWER PIPE

PVC--SDR—26

PVC-SDR-21

DUCTILE IRON CL 52

• CIRCLE TYPE OF STONE

CA--6 GRADE 8 or 9


CA--11 #6 WASHED

Please draw location of pipe to be repaired on the diagram.

**STREET ADDRESS** \_\_\_\_\_

**PERMIT NUMBER** \_\_\_\_\_

**(To be assigned by Village)**

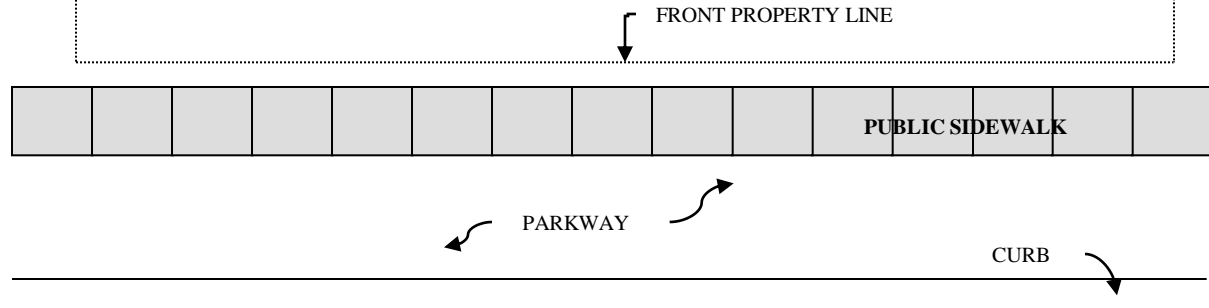

**FOR UTILITY LOCATIONS  
PLEASE CALL**

J.U.L.I.E. AT 1-800-892-0123 or 811 and  
ELK GROVE PUBLIC WORKS AT (847)734-8800  
AT LEAST 48 HOURS IN ADVANCE

**STREET**